

Permabond®

Marine Adhesives

ISO 9001 Certified
"Our Science ... Your Success"

Permabond offers a range of adhesive technologies suitable for use in shipbuilding, repair, and maintenance. Example applications include:

- Permabond adhesives are ideal for bonding gears to shafts, repairing and replacing spun bearings, bonding bushings and sealing and gasketing gear box housings.
- Permabond structural grade adhesives and metal plates are used to strengthen areas with stress cracks resulting from environmental and operational conditions.
- Permabond anaerobic FIP gaskets (form in place) are used to seal flanges and bolt holes on a ship's heat exchanger.
- Permabond retaining compounds offer an excellent alternative to welding or brazing. Gap filling and strong bonds in one step allows for relaxed tolerances of machined parts.

Permabond® Adhesive and Sealant Features & Benefits

Benefits of Permabond anaerobic adhesives and sealants:

- Available in a range of viscosities to suit component size, diameter, and fit
- Prevent corrosion, metal fretting, vibration loosening.
- Machining tolerances can be relaxed (no more interference or shrink fits)
- Help lubricate parts making the assembly process much easier
- Permabond gasketmakers are ideal for making a whole variety of different shaped gaskets
- Excellent resistance to water, oil, petrol and other chemicals.
- High temperature resistant products also available.

Benefits of Permabond adhesives and sealants over welding or brazing

- Less skill involved - no need for a trained welder
- Reduced workplace hazards - no oxy-acetylene needed
- No pin prick weld holes; improved sealing
- More choice in terms of using dissimilar materials
- Adhesives available with metallic colour to give a good aesthetic appearance
- Reduced costs

Ideal for bonding:

ABS

Acrylic

Aluminium

Carbon Fibre

Composite

EPDM

Ferrite

FRP & GRP

Glass

Laminate

Leather

Nylon

Phenolic

Polycarbonate

Polyethylene*

Polypropylene*

Polystyrene

PVC

Rubber

Steel

Titanium

Zinc

+Many more materials

*Specific grades only



Permabond®
Engineering Adhesives

Marine Adhesives

Features	Typical Applications	Cure method	Viscosity (mPa.s) cP	Gap fill (mm) in	Max. shear strength steel (MPa) psi	Temperature range (°C) °F	Availability
Permabond A1042 Removable anaerobic threadlocker - prevents vibration loosening, corrosion, leakage	Threadlocking and sealing hydraulics	Anaerobic cure	2rpm: 8,000 20rpm: 1700	(0.12) 0.005	(12) 1,700	(-55 to +150) -65 to +300	Europe, Middle East, Australia
Permabond MM115 Removable anaerobic threadlocker - prevents vibration loosening, corrosion, leakage	Threadlocking	Anaerobic cure	1,300	(0.15) 0.006	(10) 1,500	(-55 to +150) -65 to +300	Americas & Asia
Permabond LM012 Hydraulic grade - no fillers	Sealing hydraulic connections	Anaerobic cure	2,000	(0.2) 0.008	(5) 750	(-55 to +175) -65 to +350	Americas & Asia
Permabond HM129 Permanent anaerobic threadlocker - can be used on oily / contaminated parts	Threadlocking nuts and bolts	Anaerobic cure	500	(0.15) 0.006	(17) 2,500	(-55 to +150) -65 to +300	Worldwide
Permabond MH196 High viscosity anaerobic sealant for making formed-in-situ gaskets and for sealing flanges and bolt holes	Gasketing and flange sealing	Anaerobic cure	2rpm: 500,000 20rpm: 100,000	(0.5) 0.02	(10) 1,450	(-55 to +200) -65 to +392	Worldwide
Permabond A131 Thread sealant - suitable for sealing fuel, water, sprinkler, and heating pipework	Thread sealing	Anaerobic cure	2rpm: 40,000 20rpm: 6,000	(0.5) 0.02	(6) 870	(-55 to +150) -65 to +300	Europe, Middle East, Australia
Permabond LH050 Thread sealant - suitable for sealing fuel, water, sprinkler, and heating pipework	Thread sealing	Anaerobic cure	250,000	(0.5) 0.02	(7) 1,000	(-55 to +177) -65 to +350	Americas & Asia
Permabond A1046 Toughened, rapid curing high strength retaining adhesive	Bonding gears to shafts, bearings into housings. Also ideal for sealing air conditioning refrigerant pipework	Anaerobic cure	2rpm: 9,000 20rpm: 2,500	(0.25) 0.01	(25) 3,600	(-55 to +150) -65 to +300	Europe, Middle East, Australia
Permabond HM165 Toughened, rapid curing high strength retaining adhesive	Bonding gears to shafts, bearings into housings. Also ideal for sealing air conditioning refrigerant pipework	Anaerobic cure	2rpm: 25,000 20rpm: 10,000	(0.3) 0.012	(20) 2,900	(-55 to +230) -65 to +446	Worldwide
Permabond A134 High viscosity retaining adhesive, suitable for bonding larger parts	Bonding gears to shafts, bearings into housings	Anaerobic cure	2rpm: 70,000 20rpm: 8,000	(0.5) 0.02	(21) 3,000	(-55 to +150) -65 to +300	Europe, Middle East, Australia



THREAD SEALING



THREADLOCKING



GASKETING



RETAINING


If you can't see the exact product you are looking for, or need more in depth technical information, Permabond's technical team would be more than happy to help. For full, up-to-date technical information, please refer to the TDS (Technical Data Sheet).

SEE BONDING and STRUCTURAL ADHESIVES ON THE FOLLOWING PAGE!

Marine Adhesives

Features	Typical Applications	Cure method	Viscosity (mPa.s) cP	Gap fill (mm) in	Max shear strength steel (MPa) psi	Temperature range (°C) °F	Availability
Permabond 2011 General purpose instant bonding gel	Repairing interior trim, bonding rubber mat edges to prevent trip hazards	Moisture cure	Gel	(0.5) 0.02	(24) 3,500	(-55 to +120) -65 to +250	Worldwide
Permabond TA4200 Adhesive for structural bonding	Repair of ship's superstructure - metal bonding	Resin & hardener (room temperature cure)	45,000	(4) 0.16	(25) 3,600	(-40 to +120) -40 to +250	Europe, Middle East, Australia
Permabond TA4810 Adhesive for structural bonding	Repair of ship's superstructure - metal bonding	Resin & hardener (room temperature cure)	175,000	(2) 0.08	(28) 4,000	(-40 to +120) -40 to +250	Americas & Asia
Permabond ET538 2-part epoxy for bonding of wood, fibre-glass, composites, metal etc. Excellent salt water resistance.	Hull, mast and deck construction & repair. Filling gaps and cracks.	Resin & hardener (room temperature cure)	Paste	(5) 0.2	(30) 4,350	(-40 to +100) -40 to +212	Worldwide

If you can't see the exact product you are looking for, or need more in depth technical information, Permabond's technical team would be more than happy to help.

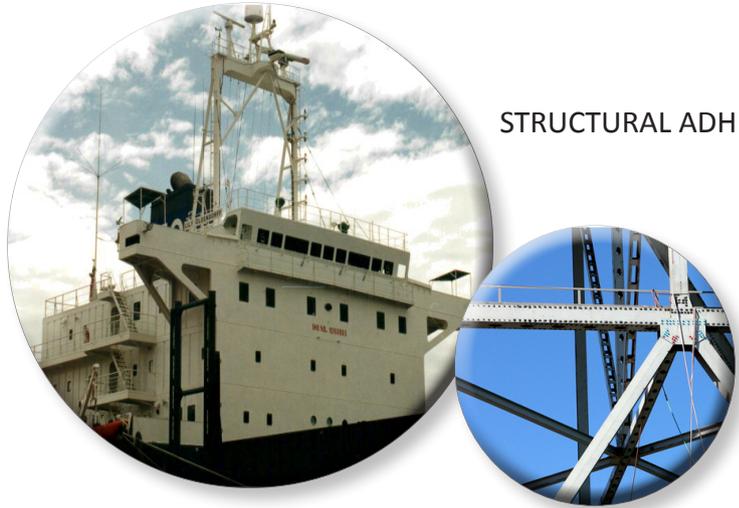

STRUCTURAL ADHESIVES

Contact Permabond

www.permabond.com

- **US Helpline - 800-640-7599**
 - **UK - 0800 975 9800**
 - **Asia + 86 21 5773 4913**
 - **General Enquiries +44(0)1962 711661**
 - **Deutschland 0800 101 3177**
 - **France 0805 111 388**
- info.europe@permabond.com
info.americas@permabond.com
info.asia@permabond.com



Distributor Stamp

The information given and the recommendations made herein are based on our experience and are believed to be accurate. No guarantee as to, or responsibility for, their accuracy can be given or accepted, however, and no statement herein is to be treated as a representation or warranty. In every case we urge and recommend that purchasers, before using any product, make their own tests to determine, to their own satisfaction, its suitability for their particular purposes under their own operating conditions. Always refer to current product technical datasheet for most recent and accurate technical information.